

WE OFFER  
PERFECT  
MIXING  
TECHNOLOGIES



PHARMACEUTICAL



NUTRACEUTICAL



FOOD



CHEMICAL



BIO



HEALTH & BEAUTY

**PTP PADDLE MIXER**

## PTP - PADDLE MIXER

PerMix PTP series Paddle Mixers are an innovative design derived from the well-known Plow Mixers (or Ploughshare Mixers, Plough Mixers). The Paddle provides the same mixing performance as a Plow but requires much less power consumption. Due to the less rotation speed of the paddles, the wearing of the mixing element for the Paddle is also less than the Plows. Besides, PerMix Paddle Mixers have a better performance dealing with the viscous/sticky materials, such as slurries, which is because the plough-shaped mixing elements tend to be wrapped by the viscous materials while the paddles don't.

Compared with the conventional Ribbon Blenders, Paddle Mixers are superior because they are able to mix the material in a more aggressive way while keeping the similar power consumption, due to the fact that the uniquely designed paddles are more pitched than ribbons in a Ribbon Blender and move more materials in a single turn.

The main difference between our PTP Paddle Mixer and PTS Plow Mixer is the mixing element: PTS Mixer uses the plough-shaped element, while PTP Mixer uses the paddle element. PerMix PTP Paddle Mixers can be used wherever the Plow Mixers are used, including but not limited to compounding, fine mixing, dispersing, suspending, emulsifying, deaerating, tempering, accelerating chemical or physical reactions, granulating, breaking down agglomerates, etc.

Both Paddle and Plow are 'aggressive mixers' that are well qualified for high mixture ratio processes up to 1:1,000,000, which means the single sample of 1 ppm of a batch volume can still have the right mixture of ingredients.




## LAB & PILOT MODELS

PerMix designs the full range of paddle mixers, including the lab size (5L full) & pilot size (up to 45L full) models for Research & Development purpose. The small size machine is very helpful for customers when the ingredients for R&D are expensive, thus helping our customer to save their limited budget at the first stage. With the good performance of the lab & pilot mixer, it is easy to scale up for a medium size or even bigger one.



## DESIGN WITH MULTI-CHOPPERS

The installation of PerMix Multi-chopper in the basic PTP powder mixer enables the breaking down of agglomerates during the mixing process.

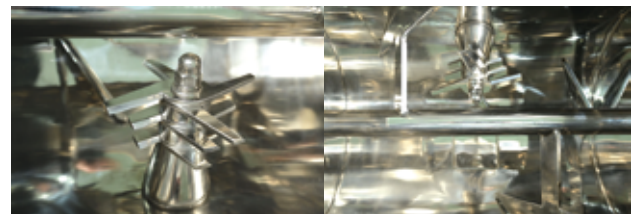

Together with the mixing element, the PerMix Multi-chopper removes lumps in the initial product, chops pasty adhesives and hinders the formation of agglomeration during the moisturizing of powdered substances. The PerMix Multi-chopper is operated independently by its own motor.



## OPTIONAL FEATURES

### Various types of mixing element

PerMix provides mainly two types of mixing elements: plough (for PTS Mixer) and paddle (for PTP Mixer). Both have their advantages: the plough-shaped element shortens the mixing time, and can easily penetrate through the dense and thick powder or paste materials, while the paddle element requires less power consumption and can deal with viscous slurry materials.

### Continuous operation

PerMix supplies mixers for continuous work when a large capacity per hour is needed for the same material. Continuous paddle mixers differ from batch paddle mixers in that the mass flow of the product is from the inlet of the container to the discharge at the opposite end.

### Heating/Cooling jacket

Jacketed trough for heating/cooling operation by steam, thermal oil, or water. ASME/PED certificate can be optional for high pressure operation.

### Feeding & Discharging

A variety of feeding & discharging methods can be selected by the customers. Discharging port can be by manual or pneumatic operation.

### Access door

Access doors can be designed for easy cleaning, inspection & maintenance.



### Construction material

We are able to offer mixers with contact part to be built by Carbon steel, SS304, SS316/316L, Titanium, Duplex stainless steel, Hastelloy, etc. For abrasive materials we offer hardened steel as the contact part, or the mixing elements to be coated with materials such as Tungsten Carbide or equivalent. Also we produce mixers all by stainless steel in order to meet the high hygienic requirement.

### Drive system

Drive system by geared motor, cycloidal reducer, worm reducer, belt or chain transmission, etc.

### Extended machine bases

Discharge clearance of PerMix mixers are available according to customer's requirement, with extended machine bases, tubular frames, platform, etc.

### Spray nozzle

Liquid can be added into the powder by spray nozzles on a pipe which is installed on the top of the mixing trough. The necessary pump and tank can also be provided by PerMix.

## SPECIFICATIONS

Model	Total capacity (liter)	Working capacity (liter)	Power (*) (kW)	Speed (RPM)	L1 (mm)	L (mm)	W (mm)	H1 (**)	H (***)
PTP-5L	5	3	1.1	0-582	180	800	500	-	-
PTP-10L	10	7	1.1	0-582	200	900	500	-	-
PTP-45	45	30	0.75	81	480	900	550	450	950
PTP-70	70	45	0.75	69	580	1,050	600	450	970
PTP-100	100	70	1.1	60	660	1,100	610	450	1,020
PTP-200	200	140	1.5	53	890	1,400	730	500	1,180
PTP-300	300	210	2.2	51	970	1,550	850	500	1,300
PTP-500	500	350	4	45	1,250	2,000	950	500	1,400
PTP-750	750	500	5.5	45	1,500	2,250	1,100	600	1,600
PTP-1000	1,000	700	7.5	33	1,900	2,600	1,150	600	1,800
PTP-1500	1,500	1,000	11	28	2,110	3,200	1,200	600	2,000
PTP-2000	2,000	1,400	15	25	2,110	3,500	1,350	600	2,200
PTP-3000	3,000	2,100	22	23	3,000	4,100	1,500	800	2,400
PTP-4000	4,000	2,800	30	17	3,000	4,200	1,550	800	2,600
PTP-5000	5,000	3,500	37	17	3,000	4,300	1,620	800	2,800

- 1. PTP-L: laboratory size
- (\*) (\*\*) (\*\*\*): Changes are available according to the customer's request.
- All specifications and illustrations are as accurate as is reasonably possible, but they are not binding.
- PerMix reserves the right to modify the design without notice.

## VACUUM MIXER DRYER

With some special modification, the PerMix PTP series Paddle Mixer can be used as a multi-stage process vessel eliminating the need for additional specialist equipment. It can be used as a mixer-dryer, mixer-granulator, de-aerator, reactor and cooler.

Contact us to find more information about the unique **PerMix PTPD series Vacuum Mixer Dryer**.

**PerMix Tec Co., Ltd.**

Room 1-1214, No.1888,  
N. Shengxin Rd, Jiading,  
Shanghai, 201807, China

Tel: +86-133-9116-8218

Fax: +86-21-3375-8218

[www.permixtec.com](http://www.permixtec.com)

[www.permix-mixing.com](http://www.permix-mixing.com)

**PerMix in China**

Shanghai, 201821, China

Contact: Mr. Aaron Huang

Tel: +86 133 911 68218

Email: [aaron.h@permixtec.com](mailto:aaron.h@permixtec.com)

**PerMix in Israel**

Adi 17940, Israel

Contact: Mr. Arie Srugo

Tel: +972-54-908-0144

Email: [sruoga@permixtec.com](mailto:sruoga@permixtec.com)

**PerMix North America**

Chicago, Illinois,

60601, USA

Contact: Mr. John Paul

Tel: +1 630-649-1357

Email: [John.paul@permixtec.com](mailto:John.paul@permixtec.com)

**South America office**

Buenos Aires, Argentina

Contact: Mr. Gonzalo Villagra

Tel: +54-9-11-35374801

Email: [gonzalo.villagra@permixtec.com](mailto:gonzalo.villagra@permixtec.com)

**UK office**

Scotland, UK

Contact: Mr. James Ryder

Tel: +44 (0) 7554139667

Email: [james.ryder@permixtec.com](mailto:james.ryder@permixtec.com)

**South Africa office**

South Africa

Contact: Mr. Martin Whelan

Email: [saf@permixtec.com](mailto:saf@permixtec.com)

**Russia office**

Contact: Mr. Vladislav Dyuzhev

Tel: + 7 910 443 9924

Email: [ru@permixtec.com](mailto:ru@permixtec.com)

**Ukraine office**

Contact: Mr. Viacheslav Pishyi

Tel: +38 067 45 44 694

Email: [ua@permixtec.com](mailto:ua@permixtec.com)

